


MS[®] Glass Fiber Filter

Recommended filters for controlling both air and water pollution and as a pre-filter for Membrane

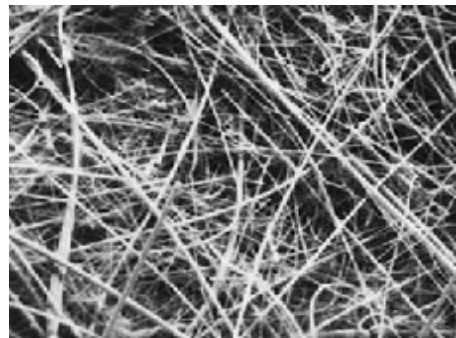

MS[®] Glass fiber filters are manufactured from 100% borosilicate glass. These depth filters combine fast flow rate with high loading capacity and retention of fine particulates. The small diameter fibers give glass fiber filter media superior efficiency and dirt holding as compared to cellulose and synthetic media.

Features

- I Made of borosilicate glass fiber without binders or with binder.
- I Stability at high temperatures: It keeps its properties up to 500 °C and 180 °C for Grade GF10.
- I Usable as Pre-filter for membranes to prevent the membranes from silting up.
- I Large surface area provides an outstanding retention capacity.
- I High flow speed and high permeability to air.
- I Reduce filtration costs and premature clogging when filtering difficult-to-filter or highly contaminated solutions.
- I Excellent wet strength for easy handling and filter integrity.

Two types of glass fiber filters are available :

Binder free glass fiber: Grade GF A, Grade GF B, Grade GF C, Grade GF D, Grade GF F, Grade GF H

Binder glass fiber: Grade GF 6, Grade GF 8, Grade GF 9, Grade GF 10

Grade GF A

- I Highly efficient for general laboratory filtration,
- I Clarification of buffer and reagent solutions
- I Corresponds to many international standards for air and water pollution monitoring

www.membrane-solutions.com

USA	Toll free: 800-553-9057 Fax: 732-412-4040 Address: 1108 Spring View Lane Plano, TX 75075
Japan	Toll free: 0066- 33-800658 Address: Suite 803# 3-2-10, Kachidoki, Chou- ku, Tokyo, 104-0054
China	Tel: 0086-21-61478115 Fax: 0086-21-61478117 / 51687551 Address: 2202 , No.1759 North Zhongshan Road, Shanghai E-mail: info@membrane-solutions.com

Grade GF B

- I Thicker than GF A with higher wet strength and significantly increased loading capacity , Suitable for filtration of large volumes
- I Pre-filter for membranes
- I Filtration of suspended solids in water/waste water analysis

Grade GF C

- I The standard filter in many parts of the world for the collection of suspended solids in potable water and natural and industrial wastes
- I Widely used for cell harvesting, liquid scintillation counting and binding assays where more loading capacity is required

Grade GF D

- I Universal membrane pre-filter material
- I Filtration in food industry

Grade GF F

- I GF F is the material upon which the EPA Method TCLP 1311 for Toxicity
- I Use for filtering extremely fine precipitates such as protein, nucleic acids, or serum precipitates

Grade GF H

- I Suitable for suspended solid analysis,
- I Cell harvesting
- I Air pollution control

Grade GF 6

- I Suitable for very fine particles
- I Removing protein from difficult-to-filter beers
- I Determination of filterable substances and the residue on ignition (dry weight)
- I Analysis of aggressive media

Grade GF 8 and Grade GF 9

- I Used in the filtration of coarse particles
- I Determination of PCB, DDE, DDT, furans and dioxins in the air
- I Environmental analysis
- I Membrane pre-filter

Grade GF 10

- I Used in the filtration of coarse particles
- I Weighing aid for infrared weighing
- I A roll filter in automatic air filtration units

Specifications

Grade	Weight (g/m ²)	Thickness (mm)	Nominal Rating (µm)	Maximum Temperature (°C)	Binder
GF A	56	0.29	1.6	500	Free
GF B	140	1.00	1.0	500	Free
GF C	54	0.28	1.2	500	Free
GF D	120	0.53	2.7	500	Free
GF F	75	0.40	0.7	500	Free
GF H	65	0.30	1.5	500	Free
GF 6	80	0.35	--	500	Inorganic
GF 8	75	0.35	--	500	Inorganic
GF 9	70	0.35	--	500	Inorganic
GF 10	70	0.35	--	180	Organic

Cross Reference

Membrane Solutions	GF A	GF B	GF C	GF D	GF F	GF H	GF 6	GF 8	GF 9	GF 10
Whatman	GF/A	GF/B	GF/C	GF/D	GF/F	934-AH	GF 6	GF 8	GF 9	GF 10

www.membrane-solutions.com

USA Toll free: 800-553-9057 Fax: 732-412-4040
Address: 1108 Spring View Lane Plano, TX 75075

Japan Toll free: 0066- 33-800658
Address: Suite 803# 3-2-10, Kachidoki, Chou- ku, Tokyo, 104-0054

China Tel: 0086-21-61478115 Fax: 0086-21-61478117 / 51687551
Address: 2202 , No.1759 North Zhongshan Road, Shanghai
E-mail: info@membrane-solutions.com